

# REBLOC 185A\_4\_5A


## Technical Datasheet

ASI B

REBLOC 185A\_4\_5A



Precast Concrete  
Vehicle Restraint System

Permanent System  
Anchored

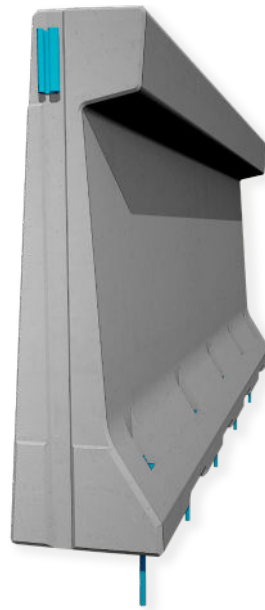

### Technical data

Containment level	H4b
Working width	W2 ( $W_N \leq 0.8 \text{ m}$ )
Impact severity level	ASI B
Vehicle intrusion	VI2 ( $VI_N \leq 0.8 \text{ m}$ )
Installation	anchored (5 x adhesive anchor M24 in concrete foundation)
Application	single-sided
Minimum installation length	32 m (8 elements)
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H in cm	400 x 57 x 185 cm
Weight/element	approx. 5700 kg
Curve radius	$r \geq 80 \text{ m}$ , smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

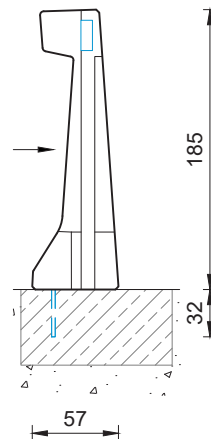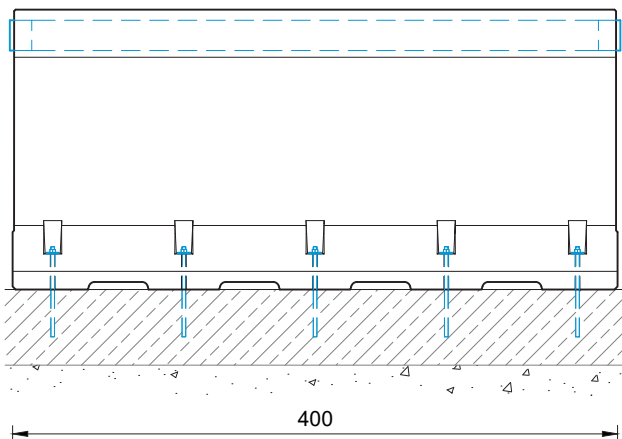

all dimensions in cm

### REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria  
Tel.: +43 (0) 2985 30528 2900  
Fax: +43 (0) 2985 30528 2901

office@rebloc.com [www.rebloc.com](http://www.rebloc.com)