

DELATABLOC®
SAFETY BARRIERS

DB 65S 6m K120S REF STM

H1 W6 B

surface mounted on asphalt

K706600A


PRODUCT DATA SHEET

Performance class	H1 W6 VI6 B
Working width W_N	W6 (1,8 m)
Vehicle intrusion VI_N	VI6 (2,1 m)
Dynamic deflection	1,42 m
Tested system length	60 m
EC Certification report	62615

System series	DB Series
Tension bar	K120S
Design	Generation 1
Product variant	REF STM

System height	65 cm
System width	39 cm
Dimensions of element (l × w × h)	600 × 39 × 65 cm
System weight / length	1.670 kg / 6 m

Mode of operation	double sided
Mode of installation	surface mounted on asphalt
Terminal anchoring	yes
Installation drawing	K706600

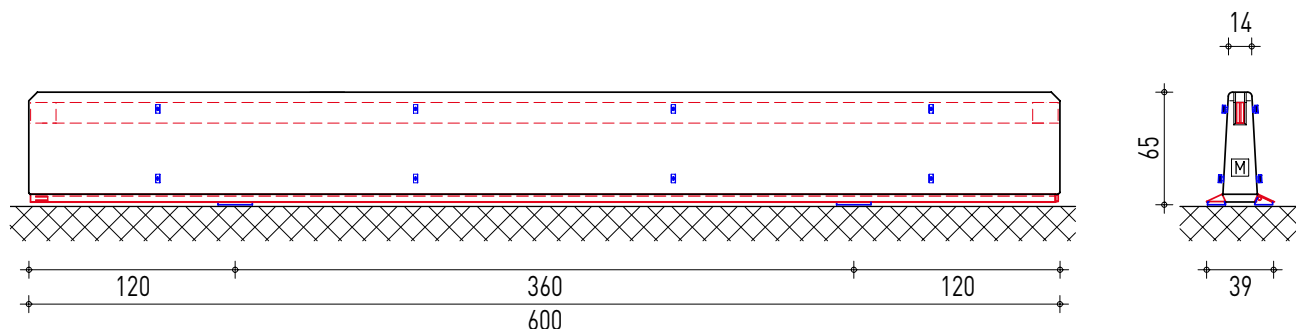

**THE LIGHT DB SERIES
PROTECTS WITH MODULAR SAFETY &
SAVES TRANSPORT COSTS.**

Compact dimensions together with high performance
up to H1 for more safety on temporary work zones.



KIRCHDORFER
ROAD & TRAFFIC

DELTABLOC®

DELTABLOC INTERNATIONAL GMBH

Industriestrasse 28
2601 Sollenau, Austria
office@deltabloc.com
+43 57715 / 470 – 0
deltabloc.com

**HOME OF
ROAD SAFETY**