

DB 65S 6m K120S REF STM

T1 W1 A

surface mounted on asphalt

K706600E


PRODUCT DATA SHEET

| | |
|----------------------------|------------|
| Performance class | T1 W1 - A |
| Working width W_N | W1 (0,4 m) |
| Vehicle intrusion V_{IN} | - (-m) |
| Dynamic deflection | 0,05 m |
| Tested system length | 60 m |
| EC Certification report | |

| | |
|-----------------|--------------|
| System series | DB Series |
| Tension bar | K120S |
| Design | Generation 1 |
| Product variant | REF STM |

| | |
|-----------------------------------|------------------|
| System height | 65 cm |
| System width | 39 cm |
| Dimensions of element (l × w × h) | 600 × 39 × 65 cm |
| System weight / length | 1.670 kg / 6 m |

| | |
|----------------------|----------------------------|
| Mode of operation | double sided |
| Mode of installation | surface mounted on asphalt |
| Terminal anchoring | yes |
| Installation drawing | K706600 |

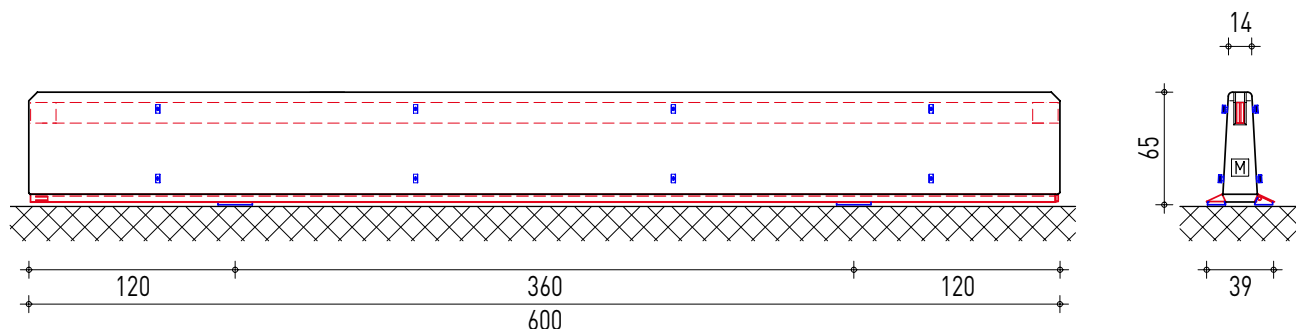

**THE LIGHT DB SERIES
PROTECTS WITH MODULAR SAFETY &
SAVES TRANSPORT COSTS.**

Compact dimensions together with high performance
up to H1 for more safety on temporary work zones.



KIRCHDORFER
ROAD & TRAFFIC

DELTABLOC®

DELTABLOC INTERNATIONAL GMBH

Industriestrasse 28
2601 Sollenau, Austria
office@deltabloc.com
+43 57715 / 470 – 0
deltabloc.com

**HOME OF
ROAD SAFETY**