


REBLOC NBH150XA/250-600_5_8A

Technical Datasheet

ASI B

**Precast Concrete
Vehicle Restraint System**

**Integrated Noise Barrier
Anchored**

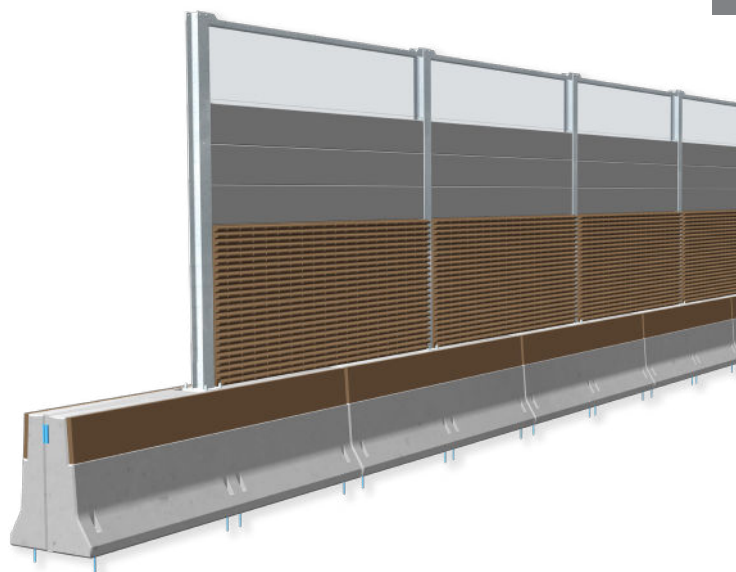

NBH150XA/250-600_5_8A

Technical data

Containment level	H4b
Working width	W4 ($W_N \leq 1.3$ m)
Impact severity level	ASI B
Vehicle intrusion	VI1 ($VI_N \leq 0.6$ m)
Sound absorption DL_α	class A3 or A4 acc. to EN 1793-1 depending on the sound absorber material
Airborne sound insulation DL_R	min. class B3 acc. to EN 1793-2 depending on the used panels
Sound reflection DL_{RI}	acc. to EN 1793-5 (in situ) depending on the used panels
Airborne sound insulation DL_{SI}	class D3 or D4 acc. to EN 1793-6 (in situ) depending on the used sealings
Installation	anchored (8 x adhesive anchors M20 in concrete foundation)
Application	single-sided double-sided
Minimum installation length	35 m (7 base elements, 6 panels)
Initial/end anchorage	not necessary, optional available
Base element NBH150XA_5;02	
Dimensions L x W x H in cm Weight	500 x 125 x 150 cm approx. 12160 kg
Concrete panel with absorber NBH100_5_200	
Dimensions L x W x H in cm Weight	497 x 39 x 100 cm approx. 2610 kg
Acrylic panel with aluminium frame (T7)	
Dimensions L x W x H in cm Weight	495 x 13 x 100 cm approx. 116 kg
Aluminium sound panel (A3-e/b)	
Dimensions L x W x H in cm Weight	496 x 12 x 50 cm approx. 44 kg / 68 kg
Curve radius	$r \geq 220$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓
Miscellaneous	Different materials, colors and creative designs are available as sound absorption material.


REBLOC NBH150XA/250-600_5_8A

Technical Datasheet

ASI B


Precast Concrete
Vehicle Restraint System

Integrated Noise Barrier
Anchored

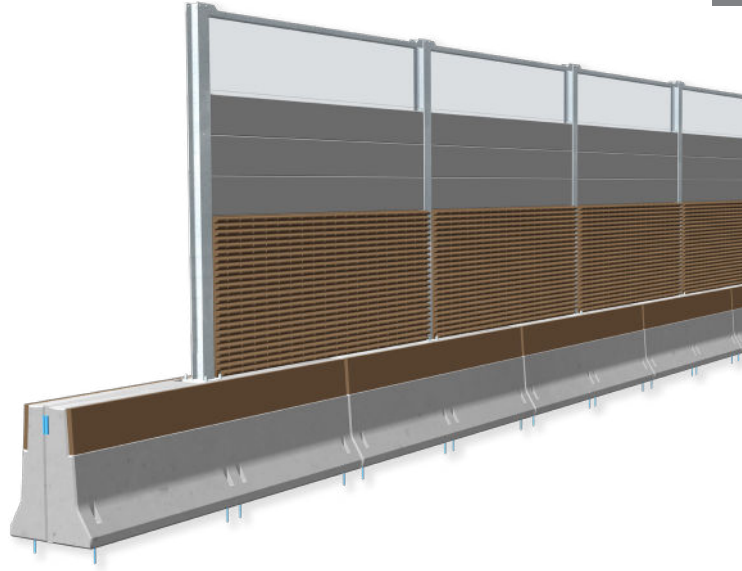

NBH150XA/250-600_5_8A

Technical drawing

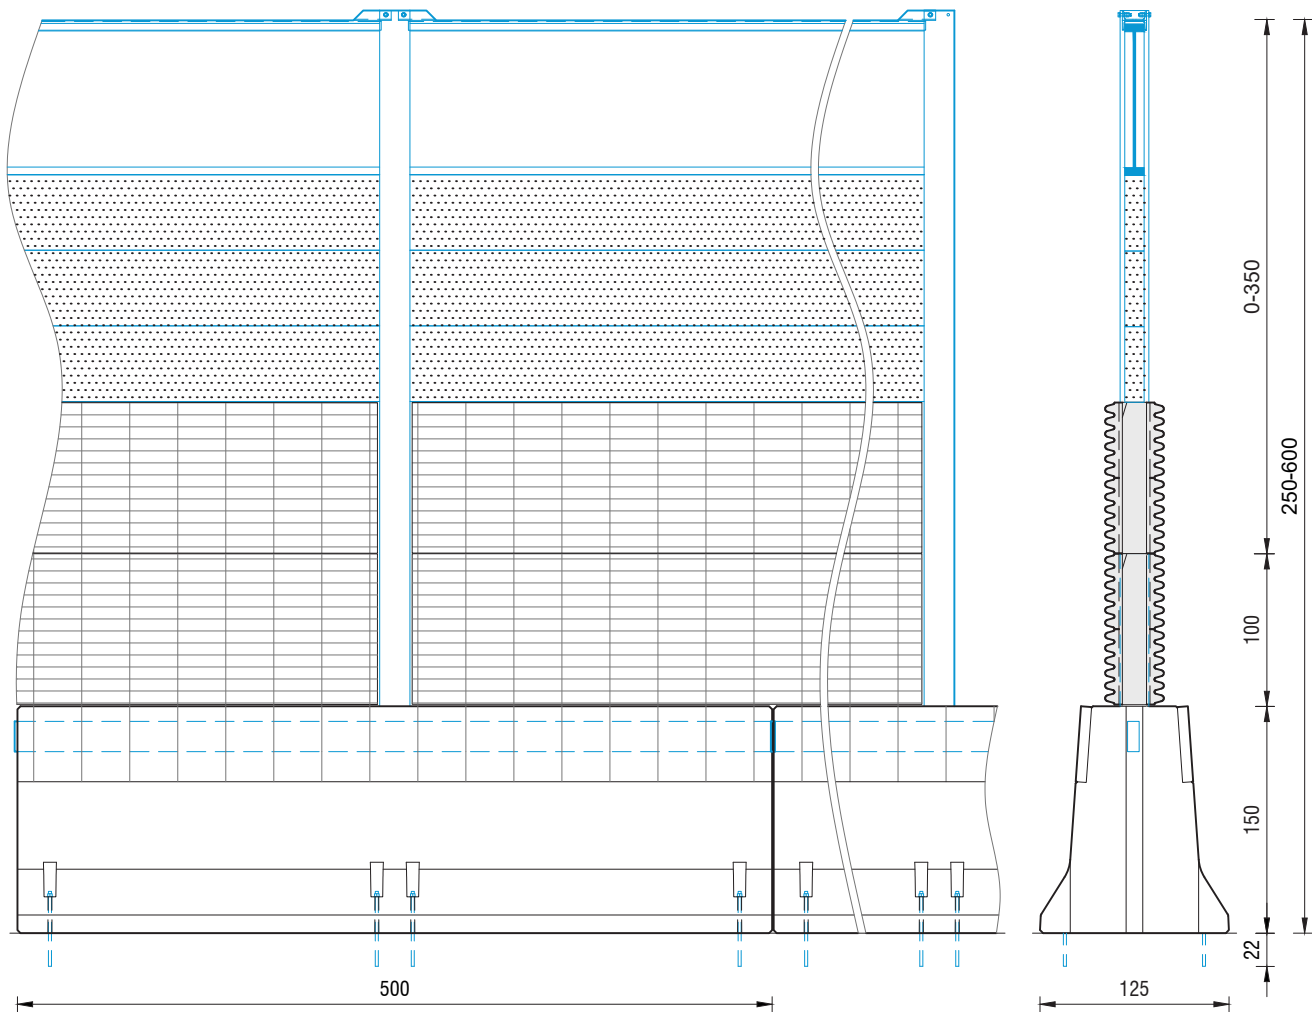

all dimensions in cm