

SAFETY BARR

DB 50SL 6m K60S LH

T3 W2 A

surface mounted on asphalt




PRODUCT DATA SHEET

Performance class	T3 W2 A
Working width	- <u>m</u>
Vehicle intrusion	(- m)
Dynamic deflection	- m
Tested system length	m
EC Certification report	

System series	DB Series
Tension bar	K60S
Design	Generation 1
Product variant	LH

System length	600 cm
System height	50 cm
System width	32 cm
System weight / length	1.090 kg / 6 m

Mode of operation	double sided
Mode of installation	surface mounted on asphalt
Terminal anchoring	no
Installation drawing	K732026

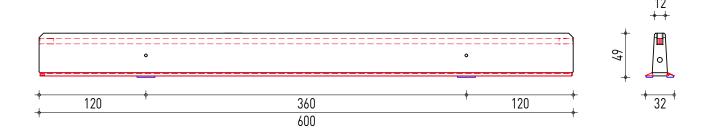

PD732026A-EN PRODUCT DATA SHEET 2021-03-23

THE LIGHT DB SERIES PROTECTS WITH MODULAR SAFETY & SAVES TRANSPORT COSTS.

Compact dimensions together with high performance up to H1 for more safety on temporary work zones.





DELTABLOC INTERNATIONAL GMBH

Industriestrasse 28 2601 Sollenau, Austria office@deltabloc.com +43 57715/470 – 0 deltabloc.com

HOME OF ROAD SAFETY