
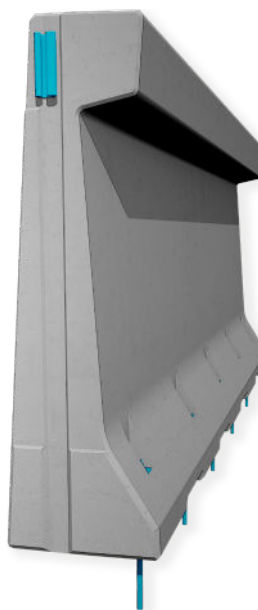
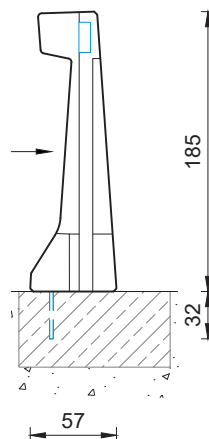


REBLOC 185A_4_5A**Technical Datasheet****ASI B****REBLOC 185A_4_5A****Precast Concrete
Vehicle Restraint System****Permanent System
Anchored****Technical data**

Containment level	H4b
Working width	W2 ($W_N \leq 0.8$ m)
Impact severity level	ASI B
Vehicle intrusion	VI2 ($VI_N \leq 0.8$ m)
Installation	anchored (5 x adhesive anchor M24 in concrete foundation)
Application	single-sided
Minimum installation length	32 m (8 elements)
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H in cm	400 x 57 x 185 cm
Weight/element	approx. 5700 kg
Curve radius	$r \geq 80$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

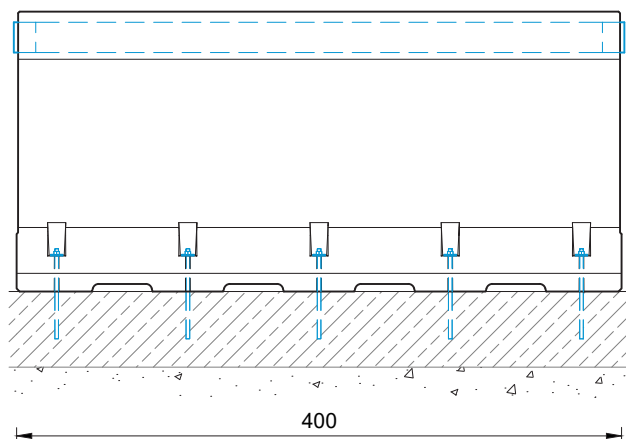

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
 Tel.: +43 (0) 2985 30528 2900
 Fax: +43 (0) 2985 30528 2901

office@rebloc.com | www.rebloc.com