

SB 50 6m MW180 REF STM

N2 W5 A

surface mounted on asphalt or concrete

PRODUCT DATA SHEET


K705820A

Performance class	N2 W5 - A
Working width W_N	W5 (1,5 m)
Vehicle intrusion V_{I_N}	- (-m)
Dynamic deflection	1,30 m
Tested system length	120 m
EC Certification report	725118609

Product series	SB Series
Tension bar	MW180
Design	Generation 2
Product variant	REF STM

System height	50 cm
System width	24 cm
Dimensions of element (l × w × h)	600 × 24 × 50 cm
Element weight / length	750 kg / 6 m

Mode of operation	double sided
Mode of installation	surface mounted on asphalt or concrete
Terminal anchoring	yes
Article number / Installation drawing	170387 / K705820

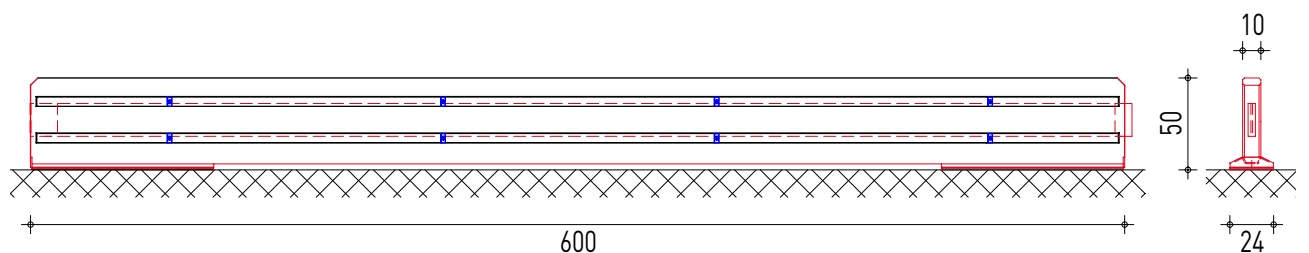

THE ULTRALIGHT SB SERIES PROTECTS WITH MODULAR SAFETY

The holistic safety concept
for a state of the art work zone protection.



KIRCHDORFER
ROAD & TRAFFIC

DELTABLOC®
HOME OF ROAD SAFETY

DELTABLOC INTERNATIONAL GMBH

Kirchdorfer Platz 2
2752 Wöllersdorf, Austria
office@deltabloc.com
+43 57715 / 470 – 0
deltabloc.com